

Dimensioning aid best wood GLULAM – CEILING

Perm. loads* [kN/m ²]	Live loads [kN/m ²]	Span length of single span beams [m]						Span lengths of double span beams [m]					
		3.00	4.00	5.00	6.00	7.00	8.00	3.00	4.00	5.00	6.00	7.00	8.00
1.00	1.00						200		100				
	1.50		100										
	2.00	100		140	180	200	220	100	100	140	180	200	200
	3.00												
	5.00	100	120	160	200	220	260	100	120				220
2.50	1.00	100					240	100					180
	1.50		120	160	180							160	160
	2.00					220	260	100	120	160	160	180	200
	3.00	100			200						180	200	220
	5.00		140	180		240	280			180	200		220
4.00	1.00												200
	1.50				200							180	
	2.00	100	140	180		240	280	100	140	140	160	200	220
	3.00				220							200	
	5.00	120				260	-				180	200	240

* The dead weight of the best wood GLULAM board has already been taken into account.

These tables are only intended for pre-dimensioning and are no substitute for structural analysis.

Fire resistance: R60 R90

Example for a GLULAM ceiling in a detached house:

Design values:

Permanent load $g = 1.0 \text{ kN/m}^2$
 Live load $q = 2.0 \text{ kN/m}^2$
 Span length $l = 5.0 \text{ m}$

Result:

Demanded thickness of ceiling = 140 mm
 Charring rate = R90

This pre-measuring is no substitute for structural verification.

The following parameters and certificates were taken into account in the calculations:

Certificate of load-bearing capacity according to DIN EN 1995-1-1:2010-12 with NA:2013-08

Certificate of structural fire design according to DIN EN 1995-1-2:2010-12 with NA:2010-12

Application class 1

Load duration class of the intermittent load: medium

$\Psi_2 = 0.3$; $k_{mod} = 0.60$; GL24h

Ultimate limit state; certificate of bending stress; certificate of (rolling) shear stress

Serviceability limit state; initial deflection $\leq l/300$; final deflection $\leq l/200$; total deflection $\leq l/300$

Verification of vibration: Width of the ceiling panel $b = 1.2 \cdot \text{span length}$; additional rigidity EI_v from 5 cm screed slab; modal damping ratio $\zeta = 0.03$; limitation of acceleration $a \leq 0.4 \text{ m/s}^2$

Dimensioning aid best wood CLT – CEILING

Perm. loads* [kN/m ²]	Live loads [kN/m ²]	Span length of single span beams [m]						Span lengths of double span beams [m]						
		3.00	4.00	5.00	6.00	7.00	8.00	3.00	4.00	5.00	6.00	7.00	8.00	
1.00	1.00													
	1.50	80	100	140	200	200	220	60	90	160	200	200	220	
	2.00	80	110	140	200	220	240	80	100	160	200	200	220	
	3.00	80	110	140	200	220	240	80	100	160	200	200	220	
	5.00	100	130	160	220	220	260	80	110	160	200	220	220	
2.50	1.00													
	1.50	90	130	160	200	220	260	80	130	160	170	170	200	
	2.00	90	130	160	200	220	260	80	130	160	170	170	200	
	3.00	100	140	180	220	240	280	90	130	160	180	200	220	
	5.00	100	140	180	220	240	280	90	130	160	180	200	220	
4.00	1.00						280							
	1.50	100	140	180	220	240		90	140	150	160	200	220	
	2.00	100	140	180	220	240		90	140	150	160	200	220	
	3.00	100	140	180	220	240		90	140	150	170	200	220	
	5.00	110	160	200	220	260		90	140	160	200	220	240	

* The dead weight of the best wood CLT board has already been taken into account.

These tables are only intended for pre-dimensioning and are no substitute for structural analysis.

Fire resistance:

R0	R30	R60	R90

Example for a CLT ceiling in a detached house:

Design values:

Permanent load $g = 1.0 \text{ kN/m}^2$
 Live load $q = 2.0 \text{ kN/m}^2$
 Span length $l = 5.0 \text{ m}$

Result:

Demanded thickness of ceiling = 140 mm
 Charring rate = R60

This pre-measuring is no substitute for structural verification.

The following parameters and certificates were taken into account in the calculations:

Certificate of load-bearing capacity according to DIN EN 1995-1-1:2010-12 with NA:2013-08

Certificate of structural fire design according to DIN EN 1995-1-2:2010-12 with NA:2010-12

Application class 1

Load duration class of the intermittent load: medium

$\Psi_2 = 0.3$; $k_{mod} = 0.60$; C24

Ultimate limit state; certificate of bending stress; certificate of (rolling) shear stress

Serviceability limit state; initial deflection $\leq l/300$; final deflection $\leq l/200$; total deflection $\leq l/300$

Verification of vibration: Width of the ceiling panel $b = 1.2 \cdot \text{span length}$; additional rigidity EI_v from 5 cm screed slab; modal damping ratio $\zeta = 0.03$; limitation of acceleration $a \leq 0.4 \text{ m/s}^2$

Dimensioning aid best wood CLT BOX (lower CLT board 60 mm)

Perm. loads* [kN/m ²]	Live loads [kN/m ²]	Span length of single span beams [m]						Span lengths of double span beams [m]								
		6.00	7.00	8.00	9.00	10.00	11.00	3.00	4.00	5.00	6.00	7.00	8.00			
1.00	1.00	220/80	220/80	240/80	260/80	300/80	340/80	220/80	220/80	220/80	220/80	240/80	240/100			
	1.50				280/80	320/80										
	2.00				260/80	300/80								340/80	380/80	
	3.00				260/80	300/80								340/80	380/80	420/100
	5.00				260/80	300/80								340/80	380/80	420/100
2.50	1.00	220/80	240/80	280/80	320/80	360/80	400/80	220/80	220/80	220/80	220/80	220/80	220/80			
	1.50				360/100	400/120										
	2.00				260/80	300/80	340/80							380/80	420/80	420/100
	3.00				260/80	300/80	340/80							380/80	420/100	420/100
	5.00				240/80	280/80	320/80							360/100	420/80	460/100
4.00	1.00	240/80	280/80	320/80	360/80	420/80	460/100	220/80	220/80	220/80	220/80	220/100	240/100			
	1.50				360/120	420/80										
	2.00				380/80	420/120	480/100									
	3.00				280/100	340/80	400/80							440/100	-	
	5.00				260/80	300/80	340/80							400/80	440/100	-

* The dead weight of the best wood CLT boards and the ribs has already been taken into account.

These tables are only intended for pre-dimensioning and are no substitute for structural analysis.

R60

Fire resistance:



Example for a CLT BOX in a multi-family house:

Design values:

Permanent load $g = 2.50 \text{ kN/m}^2$
 Live load $q = 3.00 \text{ kN/m}^2$
 Span length $l = 9.00 \text{ m}$

Result: 340/80

Thickness of ceiling = 340 mm
 Rib width = 80 mm
 Charring rate = R60

The following parameters and certificates were taken into account in the calculations:

Certificate of load-bearing capacity according to DIN EN 1995-1-1:2010-12 with NA:2013-08

Certificate of structural fire design according to DIN EN 1995-1-2:2010-12 with NA:2010-12

Upper CLT board: 60 mm; lower CLT board: 60 mm

Application class 1

Load duration class of the intermittent load: medium

$\Psi_2 = 0.3$; $k_{ser} = 0.60$; C24

Ultimate limit state: Certificate of bending stress, certificate of (rolling) shear stress

Serviceability limit state: Initial deflection $\leq l/300$; final deflection $\leq l/200$; total deflection $\leq l/300$

Verification of vibration: Width of the ceiling panel $b = 1.2 \cdot l$; additional rigidity EI_{ky} from 5 cm screed slab; modal damping ratio $\zeta = 0.03$; limitation of acceleration $a \leq 0.4 \text{ m/s}^2$

Dimensioning aid best wood CLT BOX – CEILING FS (lower CLT board 60 mm)

Perm. loads* [kN/m ²]	Live loads [kN/m ²]	Span length of single span beams [m]						Span lengths of double span beams [m]						
		6.00	7.00	8.00	9.00	10.00	11.00	3.00	4.00	5.00	6.00	7.00	8.00	
1.00	1.00	240/80	300/80	360/80	280/80	320/80	340/80	220/80	220/80	220/80	240/80	300/80	360/80	
	1.50				300/80	340/80	360/80							
	2.00				300/80	340/80	380/80							
	3.00				340/100	380/100	420/120							
	5.00				340/100	380/100	420/120							
2.50	1.00	280/80	240/80	280/80	320/120	380/80	420/80	220/80	220/80	220/80	280/80	220/100	220/100	
	1.50		260/80	300/80	340/80	420/100								
	2.00		260/80	300/80	340/80	420/100								
	3.00		280/100	280/100	320/100	360/100	400/80							440/80
	5.00		280/100	280/100	320/100	360/100	420/100							460/100
4.00	1.00	240/100	280/100	320/100	360/120	420/80	460/100	220/80	220/80	240/100	220/100	220/120	240/120	
	1.50			320/100	380/80	420/100	460/120							
	2.00			340/80	380/80	420/100	480/100							
	3.00			340/100	380/100	440/100	480/100							
	5.00			300/100	340/120	400/100	440/120							-

* The dead weight of the best wood CLT BOX – CEILING FS and the chippings in the rafter has already been taken into account.

These tables are only intended for pre-dimensioning and are no substitute for structural analysis.

R60

Fire resistance:



Example for a CLT BOX– CEILING FS in a multi-family house:

Design values:

Permanent load $g = 2.50 \text{ kN/m}^2$
 Live load $q = 3.00 \text{ kN/m}^2$
 Span length $l = 9.00 \text{ m}$

Result: 340/80

Thickness of ceiling = 340 mm
 Rib width = 80 mm
 Charring rate = R60

The following parameters and certificates were taken into account in the calculations for the dimensioning aid best wood CLT BOX – CEILING FS:

Element width: 1.25 m

Verification with 40 kg/m² chippings in the CLT BOX – CEILING FS

Certificate of load-bearing capacity according to DIN EN 1995-1-1:2010-12 with NA:2013-08

Certificate of structural fire design according to DIN EN 1995-1-2:2010-12 with NA:2010-12

Upper CLT board: 60 mm; lower CLT board: 60 mm

Application class 1

Load duration class of the intermittent load: medium

$\Psi_2 = 0.3$; $k_{mod} = 0.60$; C24

Ultimate limit state: Certificate of bending stress, certificate of (rolling) shear stress

Serviceability limit state: Initial deflection $\leq l/300$; final deflection $\leq l/200$; total deflection $\leq l/300$

Verification of vibration: Width of the ceiling panel $b = 1.2 \cdot l$; additional rigidity EI_{eq} from 5 cm screed slab; modal damping ratio $\zeta = 0.03$; limitation of acceleration $a \leq 0.4 \text{ m/s}^2$

Dimensioning aid best wood CLT BOX – CEILING FS (lower CLT board 90 mm)

Perm. loads* [kN/m ²]	Live loads [kN/m ²]	Span length of single span beams [m]						Span lengths of double span beams [m]									
		6.00	7.00	8.00	9.00	10.00	11.00	3.00	4.00	5.00	6.00	7.00	8.00				
1.00	1.00	250/80	310/80	310/120	310/80	350/80	250/80	250/80	250/80	250/80	310/80	310/120					
	1.50				290/80	330/80											
	2.00				310/80	350/80							370/80				
	3.00				310/80	350/80							390/80				
	5.00				250/100	350/100							390/100	430/100			
2.50	1.00	290/80	250/80	290/80	330/80	370/80	250/80	250/80	250/80	290/80	250/100	250/100					
	1.50				330/120	370/120											
	2.00				330/120	390/80							430/80				
	3.00				270/80	310/80							350/80	250/120	250/120		
	5.00				290/100	290/100							330/100	370/100	410/100	450/120	250/100
4.00	1.00	250/80	290/80	330/80	370/80	410/100	250/80	250/80	250/100	250/100	250/120	250/120					
	1.50				370/100	430/80							470/80				
	2.00				370/100	430/100							490/100				
	3.00				250/100	290/100							330/100	390/100	430/100	250/120	290/120
	5.00				250/120	310/100							350/100	390/100	450/100	490/100	250/100

* The dead weight of the best wood CLT BOX – CEILING FS and the chippings in the rafter has already been taken into account.

These tables are only intended for pre-dimensioning and are no substitute for structural analysis.

R90

Fire resistance:



Example for a CLT BOX– CEILING FS in a multi-family house:

Design values:

Permanent load $g = 2.50 \text{ kN/m}^2$
 Live load $q = 3.00 \text{ kN/m}^2$
 Span length $l = 9.00 \text{ m}$

Result: 350/80

Thickness of ceiling = 350 mm
 Rib width = 80 mm
 Charring rate = R90

The following parameters and certificates were taken into account in the calculations for the dimensioning aid best wood CLT BOX – CEILING FS:

Element width: 1.25 m

Verification with 40 kg/m² chippings in the CLT BOX – CEILING FS

Certificate of load-bearing capacity according to DIN EN 1995-1-1:2010-12 with NA:2013-08

Certificate of structural fire design according to DIN EN 1995-1-2:2010-12 with NA:2010-12

Upper CLT board: 60 mm; lower CLT board: 90 mm

Application class 1

Load duration class of the intermittent load: medium

$\Psi_2 = 0.3$; $k_{mod} = 0.60$; C24

Ultimate limit state: Certificate of bending stress, certificate of (rolling) shear stress

Serviceability limit state: Initial deflection $\leq l/300$; final deflection $\leq l/200$; total deflection $\leq l/300$

Verification of vibration: Width of the ceiling panel $b = 1.2 \cdot l$; additional rigidity EI_{eq} from 5 cm screed slab; modal damping ratio $\zeta = 0.03$; limitation of acceleration $a \leq 0.4 \text{ m/s}^2$

Dimensioning aid best wood CLT BOX open at the top

Perm. loads* [kN/m ²]	Live loads [kN/m ²]	Span length of single span beams [m]						Span lengths of double span beams [m]										
		4.00	5.00	6.00	7.00	8.00	9.00	4.00	5.00	6.00	7.00	8.00	9.00					
1.00	1.00	160/80	180/80	240/120	260/120	280/100	300/100	160/80	160/80	200/80	240/100	300/120	360/120					
	2.00						300/120											
	3.00						300/100							340/100				
	5.00						340/100							380/120				
	1.00						320/100							360/100				
2.50	1.50	160/100	200/120	240/100	280/120	320/120	360/120	160/80	160/120	240/100	300/120	320/120	340/120					
	2.00													280/120				
	3.00													240/120	300/100	340/100	380/120	
	5.00													320/100	360/120	400/120		
	1.00													320/100	360/100			
4.00	1.00	180/80	220/100	260/120	320/100	360/120	400/120	160/80	200/100	260/120	280/120	300/120	300/120					
	1.50	420/80																
	2.00	180/100											220/120	280/100	320/120	380/100	420/120	320/100
	3.00	420/120																
	5.00	440/120																

* The dead weight of the best wood CLT BOX – CEILING has already been taken into account.

These tables are only intended for pre-dimensioning and are no substitute for structural analysis.

R60

Fire resistance:



Example for a CLT BOX open at the top in a multi-family house:

Design values:

Permanent load $g = 2.50 \text{ kN/m}^2$
 Live load $q = 3.00 \text{ kN/m}^2$
 Span length $l = 7.00 \text{ m}$

Result: 300/100

Thickness of ceiling = 300 mm
 Rib width = 100 mm
 Charring rate = R60

The following parameters and certificates were taken into account in the calculations for the dimensioning aid best wood CLT BOX open at the top:

Element width: 1.20 m

Verification with 40 kg/m² chippings in the CLT BOX – CEILING FS

Certificate of load-bearing capacity according to DIN EN 1995-1-1:2010-12 with NA:2013-08

Certificate of structural fire design according to DIN EN 1995-1-2:2010-12 with NA:2010-12

Lower CLT board: 60 mm

Application class 1

Load duration class of the intermittent load: medium

$\Psi_2 = 0.3$; $k_{mod} = 0.60$; C24

Ultimate limit state: Certificate of bending stress, certificate of (rolling) shear stress

Serviceability limit state: Initial deflection $\leq l/300$; final deflection $\leq l/200$; total deflection $\leq l/300$

Verification of vibration: Width of the ceiling panel $b = 1.2 * l$; additional rigidity EI_{eq} from 5 cm screed slab; modal damping ratio $\zeta = 0.03$; limitation of acceleration $a \leq 0.4 \text{ m/s}^2$

Dimensioning aid best wood CLT BOX open at the bottom

Perm. loads* [kN/m ²]	Live loads [kN/m ²]	Span length of single span beams [m]						Span lengths of double span beams [m]					
		4,00	5,00	6,00	7,00	8,00	9,00	3,00	4,00	5,00	6,00	7,00	8,00
1,00	1,00	160/80	180/80	240/100	300/120	380/100	420/120	160/80	160/80	180/80	240/100	300/120	380/100
	2,00												
	3,00	180/120	240/120	260/120	320/120	360/100	160/100	160/100	180/120	240/120	300/120	380/100	
	5,00	180/100	220/120	260/120	320/120	360/100	160/100	180/100	220/120	260/120	320/120	380/100	
	2,50	160/100	240/100	300/120	280/120	320/120	360/120	160/80	160/100	240/100	300/120	280/120	300/120
3,00	160/120	240/120	300/120	320/120	340/120	380/120	420/120	160/100	160/120	240/120	300/120	320/120	
5,00	180/120	240/120	300/120	320/120	380/120	420/120	460/120	160/100	180/120	240/120	300/120	380/120	
4,00	1,00	200/80	260/120	260/120	300/120	360/100	420/100	160/80	200/80	260/120	240/120	280/120	320/120
	1,50				320/100	360/100	420/100	160/80	200/80		260/120	280/120	320/120
	2,00	200/100	280/120	320/120	360/120	420/120	160/100	200/100	260/120	300/120	340/120		
	3,00	200/100	280/120	320/120	360/120	420/120	160/100	200/100	260/120	300/120	340/120		
	5,00	220/100	300/120	360/120	400/120	460/120	160/120	200/120	260/120	300/120	360/120	400/120	

* The dead weight of the best wood CLT BOX – CEILING has already been taken into account.

These tables are only intended for pre-dimensioning and are no substitute for structural analysis.

RO

Fire resistance:

Example for a CLT BOX open at the bottom in a multi-family house:

Design values:

Permanent load $g = 2,50 \text{ kN/m}^2$
 Live load $q = 3,00 \text{ kN/m}^2$
 Span length $l = 8,00 \text{ m}$

Results: 340/120

Thickness of ceiling = 340 mm
 Rib width = 120 mm
 Charring rate = RO

The following parameters and certificates were taken into account in the calculations for the dimensioning aid best wood CLT BOX open at the bottom:

Element width: 1.20 m

Verification with 40 kg/m² chippings in the CLT BOX – CEILING FS

Certificate of load-bearing capacity according to DIN EN 1995-1-1:2010-12 with NA:2013-08

Certificate of structural fire design according to DIN EN 1995-1-2:2010-12 with NA:2010-12

CLT board top: 60 mm

Application class 1

Load duration class of the intermittent load: medium

$\Psi_2 = 0.3$; $k_{mod} = 0.60$; C24


Ultimate limit state: Certificate of bending stress, certificate of (rolling) shear stress

Serviceability limit state: Initial deflection $\leq l/300$; final deflection $\leq l/200$; total deflection $\leq l/300$

Verification of vibration: Width of the ceiling panel $b = 1.2 * l$; additional rigidity EI_{eq} from 5 cm screed slab; modal damping ratio $\zeta = 0.03$; limitation of acceleration $a \leq 0.4 \text{ m/s}^2$

Maximum line loads and point loads on closed CLT BOX elements

The line loads and point loads listed in the following are possible on closed CLT BOX elements. The specified values must be multiplied by the relevant modification coefficient k_{mod} . The resulting value is the maximum rated value of the effect from the wall standing on the CLT BOX – CEILING.

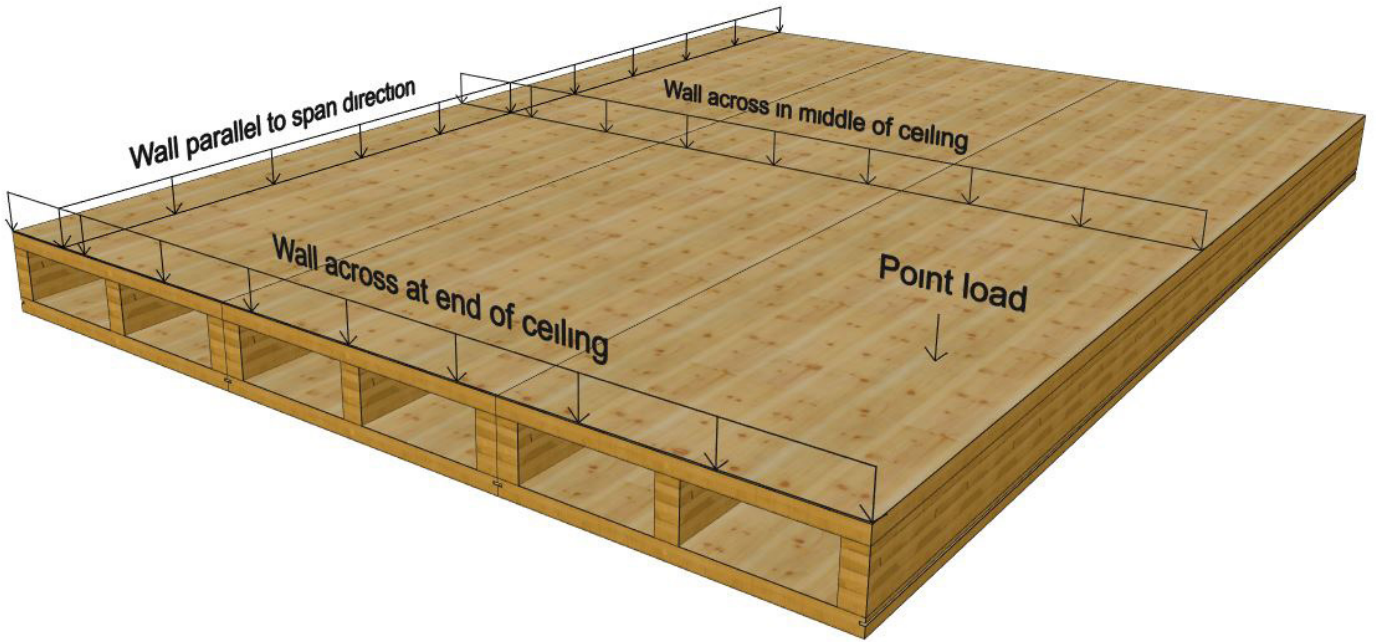

Line loads:

Wall parallel to ceiling span direction

Ceiling width b [mm]	Wall width b [mm]													
	40	60	80	100	120	140	160	180	200	220	240	260	280	300
900	11.45	11.72	12.01	12.31	12.62	12.96	13.31	13.68	14.07	14.48	14.92	15.38	15.88	16.41
910	11.32	11.58	11.86	12.16	12.46	12.79	13.13	13.49	13.87	14.27	14.70	15.15	15.63	16.14
920	11.19	11.45	11.72	12.01	12.31	12.62	12.96	13.31	13.68	14.07	14.48	14.92	15.38	15.88
930	11.06	11.32	11.58	11.86	12.16	12.46	12.79	13.13	13.49	13.87	14.27	14.70	15.15	15.63
940	10.94	11.19	11.45	11.72	12.01	12.31	12.62	12.96	13.31	13.68	14.07	14.48	14.92	15.38
950	10.82	11.06	11.32	11.58	11.86	12.16	12.46	12.79	13.13	13.49	13.87	14.27	14.70	15.15
960	10.70	10.94	11.19	11.45	11.72	12.01	12.31	12.62	12.96	13.31	13.68	14.07	14.48	14.92
970	10.59	10.82	11.06	11.32	11.58	11.86	12.16	12.46	12.79	13.13	13.49	13.87	14.27	14.70
980	10.47	10.70	10.94	11.19	11.45	11.72	12.01	12.31	12.62	12.96	13.31	13.68	14.07	14.48
990	10.36	10.59	10.82	11.06	11.32	11.58	11.86	12.16	12.46	12.79	13.13	13.49	13.87	14.27
1000	10.26	10.47	10.70	10.94	11.19	11.45	11.72	12.01	12.31	12.62	12.96	13.31	13.68	14.07
1010	10.15	10.36	10.59	10.82	11.06	11.32	11.58	11.86	12.16	12.46	12.79	13.13	13.49	13.87
1020	10.05	10.26	10.47	10.70	10.94	11.19	11.45	11.72	12.01	12.31	12.62	12.96	13.31	13.68
1030	9.95	10.15	10.36	10.59	10.82	11.06	11.32	11.58	11.86	12.16	12.46	12.79	13.13	13.49
1040	9.85	10.05	10.26	10.47	10.70	10.94	11.19	11.45	11.72	12.01	12.31	12.62	12.96	13.31
1050	9.75	9.95	10.15	10.36	10.59	10.82	11.06	11.32	11.58	11.86	12.16	12.46	12.79	13.13
1060	9.65	9.85	10.05	10.26	10.47	10.70	10.94	11.19	11.45	11.72	12.01	12.31	12.62	12.96
1070	9.56	9.75	9.95	10.15	10.36	10.59	10.82	11.06	11.32	11.58	11.86	12.16	12.46	12.79
1080	9.47	9.65	9.85	10.05	10.26	10.47	10.70	10.94	11.19	11.45	11.72	12.01	12.31	12.62
1090	9.38	9.56	9.75	9.95	10.15	10.36	10.59	10.82	11.06	11.32	11.58	11.86	12.16	12.46
1100	9.29	9.47	9.65	9.85	10.05	10.26	10.47	10.70	10.94	11.19	11.45	11.72	12.01	12.31
1110	9.20	9.38	9.56	9.75	9.95	10.15	10.36	10.59	10.82	11.06	11.32	11.58	11.86	12.16
1120	9.12	9.29	9.47	9.65	9.85	10.05	10.26	10.47	10.70	10.94	11.19	11.45	11.72	12.01
1130	9.03	9.20	9.38	9.56	9.75	9.95	10.15	10.36	10.59	10.82	11.06	11.32	11.58	11.86
1140	8.95	9.12	9.29	9.47	9.65	9.85	10.05	10.26	10.47	10.70	10.94	11.19	11.45	11.72
1150	8.87	9.03	9.20	9.38	9.56	9.75	9.95	10.15	10.36	10.59	10.82	11.06	11.32	11.58
1160	8.79	8.95	9.12	9.29	9.47	9.65	9.85	10.05	10.26	10.47	10.70	10.94	11.19	11.45
1170	8.71	8.87	9.03	9.20	9.38	9.56	9.75	9.95	10.15	10.36	10.59	10.82	11.06	11.32
1180	8.64	8.79	8.95	9.12	9.29	9.47	9.65	9.85	10.05	10.26	10.47	10.70	10.94	11.19
1190	8.56	8.71	8.87	9.03	9.20	9.38	9.56	9.75	9.95	10.15	10.36	10.59	10.82	11.06
1200	8.49	8.64	8.79	8.95	9.12	9.29	9.47	9.65	9.85	10.05	10.26	10.47	10.70	10.94
1210	8.42	8.56	8.71	8.87	9.03	9.20	9.38	9.56	9.75	9.95	10.15	10.36	10.59	10.82
1220	8.34	8.49	8.64	8.79	8.95	9.12	9.29	9.47	9.65	9.85	10.05	10.26	10.47	10.70
1230	8.27	8.42	8.56	8.71	8.87	9.03	9.20	9.38	9.56	9.75	9.95	10.15	10.36	10.59
1240	8.21	8.34	8.49	8.64	8.79	8.95	9.12	9.29	9.47	9.65	9.85	10.05	10.26	10.47
1250	8.14	8.27	8.42	8.56	8.71	8.87	9.03	9.20	9.38	9.56	9.75	9.95	10.15	10.36

The specified loads are in kN/m

Wall across ceiling span direction - on end of ceiling

Ceiling width b [mm]	Wall width b [mm]													
	40	60	80	100	120	140	160	180	200	220	240	260	280	300
900	3.89	5.83	7.78	9.72	11.67	13.61	15.56	17.50	19.45	21.39	23.34	25.28	27.23	29.17
910	3.80	5.71	7.61	9.51	11.41	13.32	15.22	17.12	19.02	20.93	22.83	24.73	26.63	28.54
920	3.72	5.58	7.45	9.31	11.17	13.03	14.89	16.75	18.61	20.47	22.34	24.20	26.06	27.92
930	3.64	5.46	7.29	9.11	10.93	12.75	14.57	16.39	18.21	20.04	21.86	23.68	25.50	27.32
940	3.57	5.35	7.13	8.91	10.70	12.48	14.26	16.05	17.83	19.61	21.39	23.18	24.96	26.74
950	3.49	5.24	6.98	8.73	10.47	12.22	13.96	15.71	17.46	19.20	20.95	22.69	24.44	26.18
960	3.42	5.13	6.84	8.55	10.26	11.97	13.68	15.38	17.09	18.80	20.51	22.22	23.93	25.64
970	3.35	5.02	6.70	8.37	10.05	11.72	13.39	15.07	16.74	18.42	20.09	21.77	23.44	25.12
980	3.28	4.92	6.56	8.20	9.84	11.48	13.12	14.76	16.40	18.04	19.68	21.32	22.96	24.61
990	3.21	4.82	6.43	8.04	9.64	11.25	12.86	14.47	16.07	17.68	19.29	20.90	22.50	24.11
1000	3.15	4.73	6.30	7.88	9.45	11.03	12.60	14.18	15.75	17.33	18.90	20.48	22.06	23.63
1010	3.09	4.63	6.18	7.72	9.27	10.81	12.35	13.90	15.44	16.99	18.53	20.08	21.62	23.17
1020	3.03	4.54	6.06	7.57	9.09	10.60	12.11	13.63	15.14	16.66	18.17	19.68	21.20	22.71
1030	2.97	4.45	5.94	7.42	8.91	10.39	11.88	13.36	14.85	16.33	17.82	19.30	20.79	22.27
1040	2.91	4.37	5.83	7.28	8.74	10.20	11.65	13.11	14.57	16.02	17.48	18.93	20.39	21.85
1050	2.86	4.29	5.72	7.14	8.57	10.00	11.43	12.86	14.29	15.72	17.15	18.58	20.00	21.43
1060	2.80	4.21	5.61	7.01	8.41	9.81	11.22	12.62	14.02	15.42	16.83	18.23	19.63	21.03
1070	2.75	4.13	5.50	6.88	8.26	9.63	11.01	12.38	13.76	15.14	16.51	17.89	19.26	20.64
1080	2.70	4.05	5.40	6.75	8.10	9.45	10.81	12.16	13.51	14.86	16.21	17.56	18.91	20.26
1090	2.65	3.98	5.30	6.63	7.96	9.28	10.61	11.93	13.26	14.59	15.91	17.24	18.56	19.89
1100	2.60	3.91	5.21	6.51	7.81	9.11	10.42	11.72	13.02	14.32	15.62	16.93	18.23	19.53
1110	2.56	3.84	5.11	6.39	7.67	8.95	10.23	11.51	12.79	14.06	15.34	16.62	17.90	19.18
1120	2.51	3.77	5.02	6.28	7.54	8.79	10.05	11.30	12.56	13.81	15.07	16.33	17.58	18.84
1130	2.47	3.70	4.94	6.17	7.40	8.64	9.87	11.10	12.34	13.57	14.81	16.04	17.27	18.51
1140	2.42	3.64	4.85	6.06	7.27	8.49	9.70	10.91	12.12	13.33	14.55	15.76	16.97	18.18
1150	2.38	3.57	4.76	5.96	7.15	8.34	9.53	10.72	11.91	13.10	14.29	15.49	16.68	17.87
1160	2.34	3.51	4.68	5.85	7.02	8.20	9.37	10.54	11.71	12.88	14.05	15.22	16.39	17.56
1170	2.30	3.45	4.60	5.75	6.91	8.06	9.21	10.36	11.51	12.66	13.81	14.96	16.11	17.26
1180	2.26	3.39	4.53	5.66	6.79	7.92	9.05	10.18	11.31	12.45	13.58	14.71	15.84	16.97
1190	2.22	3.34	4.45	5.56	6.67	7.79	8.90	10.01	11.12	12.24	13.35	14.46	15.57	16.69
1200	2.19	3.28	4.38	5.47	6.56	7.66	8.75	9.85	10.94	12.03	13.13	14.22	15.32	16.41
1210	2.15	3.23	4.30	5.38	6.46	7.53	8.61	9.68	10.76	11.84	12.91	13.99	15.06	16.14
1220	2.12	3.18	4.23	5.29	6.35	7.41	8.47	9.53	10.58	11.64	12.70	13.76	14.82	15.88
1230	2.08	3.12	4.17	5.21	6.25	7.29	8.33	9.37	10.41	11.45	12.50	13.54	14.58	15.62
1240	2.05	3.07	4.10	5.12	6.15	7.17	8.20	9.22	10.25	11.27	12.29	13.32	14.34	15.37
1250	2.02	3.02	4.03	5.04	6.05	7.06	8.07	9.07	10.08	11.09	12.10	13.11	14.12	15.12

The specified loads are in kN/m

Wall across ceiling span direction - on middle of ceiling

Ceiling width b [mm]	Wall width b [mm]													
	40	60	80	100	120	140	160	180	200	220	240	260	280	300
900	5.83	8.75	11.67	14.59	17.50	20.42	23.34	26.26	29.17	32.09	35.01	37.93	40.84	43.76
910	5.71	8.56	11.41	14.27	17.12	19.98	22.83	25.68	28.54	31.39	34.24	37.10	39.95	42.80
920	5.58	8.38	11.17	13.96	16.75	19.54	22.34	25.13	27.92	30.71	33.50	36.29	39.09	41.88
930	5.46	8.20	10.93	13.66	16.39	19.13	21.86	24.59	27.32	30.05	32.79	35.52	38.25	40.98
940	5.35	8.02	10.70	13.37	16.05	18.72	21.39	24.07	26.74	29.42	32.09	34.77	37.44	40.12
950	5.24	7.86	10.47	13.09	15.71	18.33	20.95	23.57	26.18	28.80	31.42	34.04	36.66	39.28
960	5.13	7.69	10.26	12.82	15.38	17.95	20.51	23.08	25.64	28.21	30.77	33.33	35.90	38.46
970	5.02	7.53	10.05	12.56	15.07	17.58	20.09	22.60	25.12	27.63	30.14	32.65	35.16	37.67
980	4.92	7.38	9.84	12.30	14.76	17.22	19.68	22.14	24.61	27.07	29.53	31.99	34.45	36.91
990	4.82	7.23	9.64	12.06	14.47	16.88	19.29	21.70	24.11	26.52	28.93	31.34	33.75	36.17
1000	4.73	7.09	9.45	11.82	14.18	16.54	18.90	21.27	23.63	25.99	28.36	30.72	33.08	35.45
1010	4.63	6.95	9.27	11.58	13.90	16.22	18.53	20.85	23.17	25.48	27.80	30.11	32.43	34.75
1020	4.54	6.81	9.09	11.36	13.63	15.90	18.17	20.44	22.71	24.98	27.26	29.53	31.80	34.07
1030	4.45	6.68	8.91	11.14	13.36	15.59	17.82	20.05	22.27	24.50	26.73	28.96	31.18	33.41
1040	4.37	6.55	8.74	10.92	13.11	15.29	17.48	19.66	21.85	24.03	26.22	28.40	30.59	32.77
1050	4.29	6.43	8.57	10.72	12.86	15.00	17.15	19.29	21.43	23.58	25.72	27.86	30.01	32.15
1060	4.21	6.31	8.41	10.52	12.62	14.72	16.83	18.93	21.03	23.13	25.24	27.34	29.44	31.55
1070	4.13	6.19	8.26	10.32	12.38	14.45	16.51	18.58	20.64	22.70	24.77	26.83	28.90	30.96
1080	4.05	6.08	8.10	10.13	12.16	14.18	16.21	18.23	20.26	22.29	24.31	26.34	28.36	30.39
1090	3.98	5.97	7.96	9.94	11.93	13.92	15.91	17.90	19.89	21.88	23.87	25.86	27.85	29.83
1100	3.91	5.86	7.81	9.76	11.72	13.67	15.62	17.58	19.53	21.48	23.44	25.39	27.34	29.29
1110	3.84	5.75	7.67	9.59	11.51	13.43	15.34	17.26	19.18	21.10	23.02	24.93	26.85	28.77
1120	3.77	5.65	7.54	9.42	11.30	13.19	15.07	16.95	18.84	20.72	22.61	24.49	26.37	28.26
1130	3.70	5.55	7.40	9.25	11.10	12.95	14.81	16.66	18.51	20.36	22.21	24.06	25.91	27.76
1140	3.64	5.45	7.27	9.09	10.91	12.73	14.55	16.36	18.18	20.00	21.82	23.64	25.46	27.27
1150	3.57	5.36	7.15	8.93	10.72	12.51	14.29	16.08	17.87	19.66	21.44	23.23	25.02	26.80
1160	3.51	5.27	7.02	8.78	10.54	12.29	14.05	15.81	17.56	19.32	21.07	22.83	24.59	26.34
1170	3.45	5.18	6.91	8.63	10.36	12.08	13.81	15.54	17.26	18.99	20.72	22.44	24.17	25.89
1180	3.39	5.09	6.79	8.49	10.18	11.88	13.58	15.27	16.97	18.67	20.37	22.06	23.76	25.46
1190	3.34	5.01	6.67	8.34	10.01	11.68	13.35	15.02	16.69	18.36	20.02	21.69	23.36	25.03
1200	3.28	4.92	6.56	8.21	9.85	11.49	13.13	14.77	16.41	18.05	19.69	21.33	22.97	24.62
1210	3.23	4.84	6.46	8.07	9.68	11.30	12.91	14.53	16.14	17.75	19.37	20.98	22.60	24.21
1220	3.18	4.76	6.35	7.94	9.53	11.11	12.70	14.29	15.88	17.46	19.05	20.64	22.23	23.81
1230	3.12	4.69	6.25	7.81	9.37	10.93	12.50	14.06	15.62	17.18	18.74	20.31	21.87	23.43
1240	3.07	4.61	6.15	7.68	9.22	10.76	12.29	13.83	15.37	16.91	18.44	19.98	21.52	23.05
1250	3.02	4.54	6.05	7.56	9.07	10.59	12.10	13.61	15.12	16.64	18.15	19.66	21.17	22.69

The specified loads are in kN/m

Point loads:

Contact surface length in ceiling span direction

Ceiling width b [mm]	Max. char. point load max Qk		
	$\ell = 50 \text{ mm}$	$\ell = 100 \text{ mm}$	$\ell = 150 \text{ mm}$
900	1.35	2.69	4.04
910	1.33	2.67	4.00
920	1.32	2.64	3.95
930	1.30	2.61	3.91
940	1.29	2.58	3.87
950	1.28	2.55	3.83
960	1.26	2.53	3.79
970	1.25	2.50	3.75
980	1.24	2.47	3.71
990	1.22	2.45	3.67
1000	1.21	2.43	3.64
1010	1.20	2.40	3.60
1020	1.19	2.38	3.57
1030	1.18	2.35	3.53
1040	1.17	2.33	3.50
1050	1.15	2.31	3.46
1060	1.14	2.29	3.43
1070	1.13	2.27	3.40
1080	1.12	2.25	3.37
1090	1.11	2.22	3.34
1100	1.10	2.20	3.31
1110	1.09	2.18	3.28
1120	1.08	2.17	3.25
1130	1.07	2.15	3.22
1140	1.06	2.13	3.19
1150	1.05	2.11	3.16
1160	1.05	2.09	3.14
1170	1.04	2.07	3.11
1180	1.03	2.06	3.08
1190	1.02	2.04	3.06
1200	1.01	2.02	3.03
1210	1.00	2.00	3.01
1220	0.99	1.99	2.98
1230	0.99	1.97	2.96
1240	0.98	1.96	2.93
1250	0.97	1.94	2.91

The specified loads are in kN